



Shipping Container Anchor Post (SCAP)

22KN CONTAINER POST

A must have for working on top of ISO containers.

The unique design of the BTS Shipping Container Anchor Post (SCAP) allows the product to be constructed and set-up in different configurations to suit the type of work being done on top of a shipping container.

The system can be set-up as a single person limited fall arrest anchor, two person limited free fall arrest or as a complete perimeter barricade system.

- Easy to install on top mount ISO corner casting.
- Rated for two (2) person tie-off unit at 22 kN (4,945.79 lbs).
- Can be set-up as a single Anchor Point, Static Line or as a complete perimeter protection.
- Optional 20 & 40 ft Adjustable Wire Rope Static Line c/w rope tensioner available.
- Maximum working load of 140kg (310 lbs) per person when used as a limited free fall anchor point.
- Steel construction.



Features



Top locking handle



Anchor points x 4



ISO locking nut



S/S Compliance plate



Side handle



Designed to work with most types of ISO shipping Containers and comes complete with storage bag

Code: CBPOST22KN



BEAVER TECHNOLOGY SERVICES
PTY LIMITED

www.btstech.com.au



Shipping Container Anchor Post (SCAP)

SPECIFICATIONS

This equipment is considered as part of a personal fall arrest system (PFAS) with a maximum capacity of 2 users at 140kg (310lbs) each.

Material & Construction:

Welded post unit: STEEL (H.D.G)

Finish:

Hot Dipp Galvanised & Orange UPOL

Service Temp

-23°C (-10°F) Min)

Weight:

(est.) 18.5kg (40.8lb)

Rated for:

two (2) person tie-off unit at 22 kN (4,945.79 lbs).

Tested to:

ANSI Z359.18 - Type A, OSHA 1910 & 1926, EN795:2012-B, CEN/TS 16415:2013, AS/NZS 5532: 2013 & AS/NZS 1891.4: 2009

OPTIONAL

ISO Life Line Kit for 20 or 40ft Containers




Code: LIFELINEKIT-20A

Code: LIFELINEKIT-40A



Note:

Optional Lifeline kits are to be used with 2 x 22kN Container posts. (CBPOST22KN)

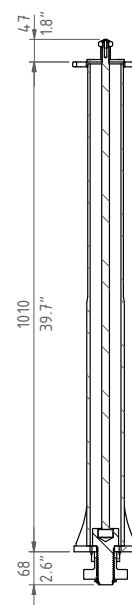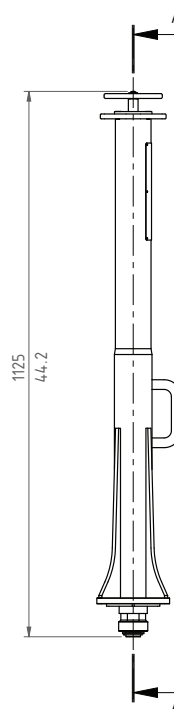

SECTION A-A

Code	Overall Length		Post Length		Base		Width including handle		Unit Weight	
Container post 22kN	mm	in	mm	in	mm	in	mm	in	kg	lbs
CBPOST22KN	1125	44.2	1010	39.7	150 x 135.5	5.9 x 5.3	173.8	6.8	18.5	40.8


Easy Installation



Place container post into ISO corner casting



Rotate post 90°

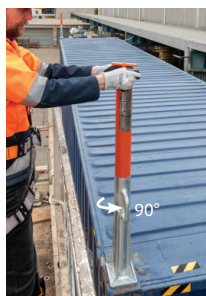

Rotate top handle until firm



Attach hook on SRL to anchor point on container post

Note:

Before using the SCAP, the user needs to be equipped with appropriate PPE and a full body harness.

An SRL shall be attached to the SCAP personnel attachment point which gets attached to the harness of the user.

When working close to the edge of the container, the worker shall not be further than 600mm (24 inches) of the installed anchor point. This is the safe working zone to prevent a pendulum effect from occurring in case of a fall.



BEAVER TECHNOLOGY SERVICES
PTY LIMITED

www.bttech.com.au



Read Instruction Manual before using.

