




Beaver Technology Services Pty Ltd
EMPOWERED BY INNOVATION

Custom Solution - Pro-6Davit with BTrenchsafe MAC base

50506 PRO-6G Davit - 2.79m 4 piece c/w 1 x Quick Release Double Sided Universal Male Interface Bracket

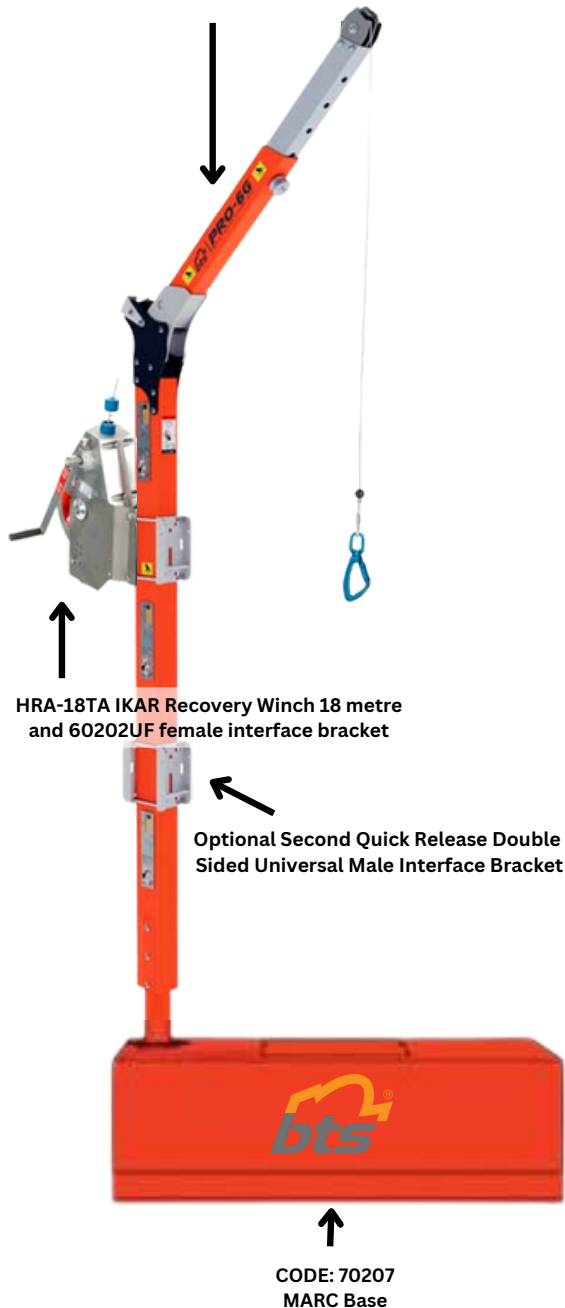

The Pro-6G Davit

a lightweight aluminium modular unit that is easy to set up by just one person. With a built in fall and davit overload indicator, it is rated to 22kN.

The PRO-6G davit system is a modular design allowing the user to create a davit setup for their individual requirements. With a range of brackets, winches and bases available, the PRO-6G Series is an ideal davit for confined space entry with a height of 1.96 - 2.79m and a offset of 0.5 to 0.7m.

Features.

- Manufactured using 6061-T6 Aluminium.
- Powder-coated with AkzoNobel Interpon D610 advance coating.
- Modular construction of up to 4 pieces allowing for ease of transport and storage.
- Inbuilt visual fall & overload indicator.
- 5 Off set adjustment settings from 0.5 to 0.7m with self locking indexing pin.
- No special tools required for assembly or disassembly.
- Suitable for both man and material lifting/lowering applications.
- W.L.L. 140kg material handling.
- Primary anchor is Man rated to 12kN (136kg including all tools and clothing).
- Secondary anchor is rated 15kN (anchor point for winch operator).
- Suitable for use in both permanent and portable davit bases.
- Swivel 360 degrees.
- Quick connect winch interface bracket.
- AS/NZS 5532/ EN795/ ANSI Z359.18 compliant.
- Independently certified by RPEQ Registered Engineer for Queensland.
- Patent Pending System.

The BTS Mobile Anchor Rescue Cube (MARC) provides for a practical solution for individuals working around open trenches & excavations where there is a risk of falls into unprotected edges. Counterweighted in design and requiring no permanent fixation with built-in lifting pockets allows the MAC to be moved around a site with relative ease. The MAC provides fall protection for 2 workers and can be set-up with either inertia reel or inertia reel c/w rescue & recovery winch feature.

Features

- Self-counterweighted base with built-in lifting pockets.
- Overall dimensions of 1.2 x 1.2 x 0.4m and weighing 1400kg.
- 2-person fall arrest system with optional fall arrest c/w rescue & recovery winch feature.
- Can be set-up as a fall restraint system and/or as a fall arrest and rescue & recovery system.
- In Built provision for fork lift tines or pallet jack.
- Complies to AS5532 as a fall arrest rated anchor point.



FS603922